


TTARP

AUTOMATIC DIE CUTTING SYSTEM

Capable • Affordable • Maintainable

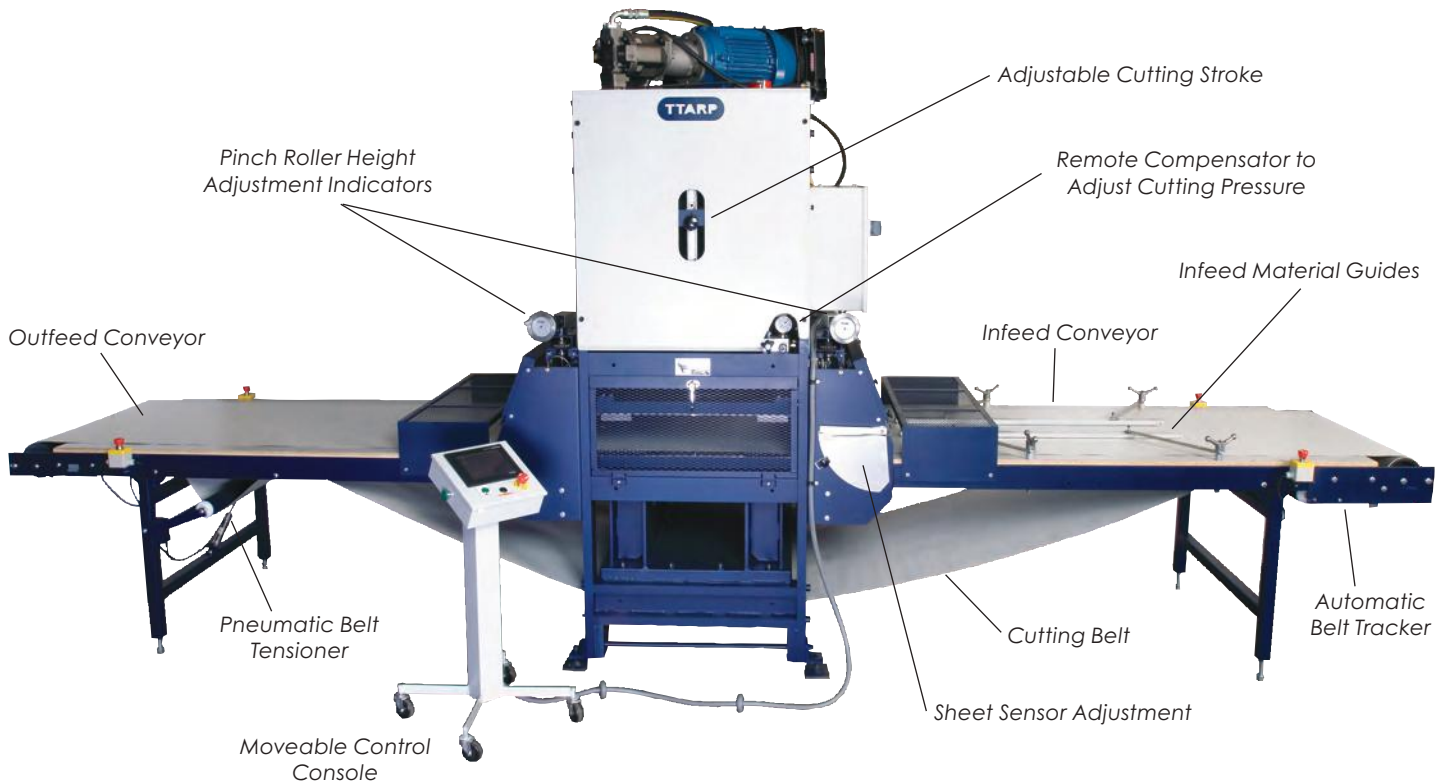

Manufactured in the U.S.A.

Designed to Cut Non-Metallic Materials for Gasket, Foam, Packaging, Rubber, Automotive, Textile and Other Industries

- Fast die change and set-up times
- Driven infeed and outfeed pinch rollers
- Infeed and outfeed conveyers
- Moveable control console for easy operation and recipe storage
- Language-selectable keypad with inch or millimeter readout
- PLC controlled servomotor indexing
- Automatic or manual operation
- Adjustable cutting stroke
- Adjustable cutting pressure
- Adjustable material indexing length
- Automatic sheet sensing and positioning
- Handles sheet or roll goods
- Thru-cutting or kiss cutting
- Stop blocks determine accurate cutting depth
- Two material guides on infeed to center material
- Cut into cutting belt or onto steel plate
- Cutting belt carries the parts or product out of the press, eliminating the need to notch
- Longer die life
- Easy to run and maintain
- Automatic belt tracking

Due to our continuous improvement program, specifications and options are subject to change without notice.

TTARP

Ttarp Co.

Toll Free: 800-871-7596
www.Ttarp.com

Specifications

Platen Sizes and Tonnage:

- 26" x 20" (66cm x 51cm) 35-ton
- 32" x 28" (81cm x 71cm) 45-ton
- 32" x 32" (81cm x 81cm) 45-ton
- 39" x 28" (99cm x 71cm) 45-ton
- 39" x 32" (99cm x 81cm) 45-ton

Overall Dimensions (32" x 32" Platen Size):

- 19'-2" L x 4'-6" W x 9'-5" H (584cm x 137cm x 287cm) plus console

Material Cutting Capacity:

- 4" (10.16cm) thick

Maximum Ram Travel (Daylight):

- 7" (17cm)

Feed Accuracy:

- ± 0.015 " (0.038cm) standard

Pinch Roller & Cutting Belt Drive:

- PLC controlled servomotor

Cutting Speed:

- Up to 38 hits-per-minute

Conveyor Length:

- Infeed - 7'-7" (231cm) standard with two material guides on infeed table
- Outfeed - 7'-7" (231cm) standard
- 10'-7" (322cm) optional
- Special lengths also available

Hydraulic Pump Motor:

- 15 HP, 3-phase AC

Voltage:

- 208, 230, 460 VAC, 3-phase
- Other voltages available

Options

- Air clean-out system for feed-thru punches (includes vacuum unit, controls and die mounting plate)
- Wind-up unit for winding up scrap or finished goods
- Let-off unit with adjustable brake for roll goods
- Color sensing photo eye or laser for accurate sensing and positioning of thin material
- Heat sealing package



Touch-screen interface (mounts on a moveable console) enables easy set-up, easy adjustments, and easy recipe saving.



Detail of adjustable rubber-coated pinch roller and sheet sensor wheel.



Automatic belt tracking for ease of use and longer belt life.

Tarp designs and manufactures a complementary range of capable, affordable, and maintainable fabricating equipment. Contact us for more information.